


Puck Beacon

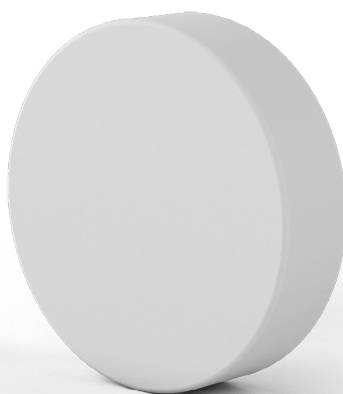

Technical Specifications

Puck Beacon

Dimensions	Diameter Height	50 mm 20.5 mm
Microcontroller		Nordic Semiconductor nRF52832
Connectivity	Bluetooth Range Available transmission power levels Sensitivity	Bluetooth 5.0 compliant up to 70 meters 0 (-30dBm), 1 (-20dBm), 2 (-16dBm), 3 (-12dBm), 4 (-8dBm), 5 (-4dBm), 6 (0dBm), 7 (4dBm) -93dBm
Battery and Power	Model Total Capacity	2x ER14250 2400mAh
Sensors		three-axis accelerometer MEMS, +-2g/+-4g/+-8g/+-16g 1Hz to 5.3kHz ODR
Functionalities		motion detection
Casing	Material Colors Protection	UV resistant white IP-65
Environmental Requirements	Operating Temperature Storage temperature Humidity (non-condensing)	-40°C / + 85°C -5°C / +35°C from 0% to 95%
Beacon Standards Compatibility**	iBeacon Kontakt.io Secure Profile Custom frames	Yes Yes Yes
Warranty		12 months



Get in Touch

Kontakt.io

Stoczniewców 3, 30-709
Kraków, Poland

T +48 123 793 445

E hello@kontakt.io

Kontakt.io

19 W 34 Street, Suite 1018,
New York Zip 10001

T +1 415-295-4558

E hello@kontakt.io